



# PROJECTOR PG705HD

## Key Features

Bright Images in Any Environment |  
 Pinpoint Color Accuracy | Immersive 3D  
 Experience | Centralized Management |  
 More Connectivity




## Product Description

The ViewSonic PG705HD is a high brightness projector that combines 4000 ANSI lumens and 1080p resolution to project images full of depth and detail, even in brightly lit spaces. With the projector's energy-saving SuperEco mode, PG705HD is able to reduce power consumption and extend the projector's lamp life to up to 15,000 hours. A longer lamp life also lowers lamp replacement and maintenance costs, which is particularly useful for corporations and schools with frequent projector usage. Dual HDMI inputs allow user to quickly connect an array of devices, while the integrated USB power supply can be used to power connected devices. In addition, PG705HD's integrated Crestron, AMX, PJ Link, and Extron compatible RS232 and LAN network solutions allow users to easily control and monitor projectors remotely for maximum efficiency.



- 01. Power key & Top IR
- 02. Keypad
- 03. LED indicator
- 04. Front IR
- 05. Zoom/Focus
- 06. Projection Lens

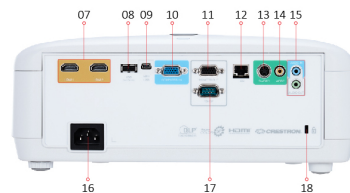

- 07. HDMI x2
- 08. USB type A (5V/1.5A)
- 09. Mini USB for service
- 10. Computer in
- 11. Monitor out
- 12. LAN

- 13. S-Video
- 14. Video
- 15. Audio in/out
- 16. AC in
- 17. RS232
- 18. Kensington lock

Visit Us [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Projection system:	0.47" 1080p
Native Resolution:	1920x1080
DC type:	DC3
Brightness:	4000 ANSI Lumens
Contrast Ratio with SuperEco mode:	12000:1
Display Color:	1.07 Billion Colors
Light Source:	Lamp
Light source life (Nor/SuperEco):	4000/15000
Lamp Watt:	240W
Lens:	F=1.94-2.06, f=15.57-18.67mm
Projection Offset:	110%+/-6%
Throw Ratio:	1.47-1.76
Image size:	30" - 300"
Throw Distance:	0.97m-11.69m(100" @3.26m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.2x
Audible Noise (Eco):	27dB
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K~102KHz
Vertical Scan Rate:	23~120Hz

**INPUT**

Computer in (D-SUB 15 pin):	1
Composite:	1
S-video:	1
Audio-in (3.5mm):	1
HDMI (HDCP):	2 (Back) (HDMI 1.4/ HDCP 1.4)

**OUTPUT**

Monitor out (D-SUB 15 pin):	1
Audio out (3.5mm):	1
Speaker:	10W
USB type A (Power):	1 (5V/1.5A)

**CONTROL**

RS232:	1
RJ45:	1
USB type mini B (Services):	1

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 310W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	3.68kg
Dimensions (WxDxH) w/adjustment foot:	332x261x135mm
Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese

**STANDARD ACCESSORY**

Power Cord:	1
VGA cable:	1
Remote Control:	1
QSG & CD:	QSG: 1 / CD: NA

**OPTIONAL ACCESSORY**

Lamp/Light Source:	RLC-117
Warranty Card:	Yes (CN Only)